




Operating Instructions

863 Valley View Road, Eighty Four PA 15330 USA
Tel: 724-941-9701 Fax: 724-941-1369 e-mail: skctech@skcinc.com
www.skcinc.com

Battery Pack for Universal Sample Pumps

1. To remove a battery pack, remove the two screws that secure the battery pack and loosen the two case screws above and below the belt clip.
2. Carefully slide battery pack out from under the belt clip. Ensure that the battery is kept level.
3. To install a battery pack, slide the front edge of the new battery pack under the belt clip and position battery pack to engage the grooves in the case.
4. Slide the battery pack toward the pump until it is flush with the pump case on all sides.
5. Reinstall battery screws and tighten the case screws.
6. Charge the new battery pack.

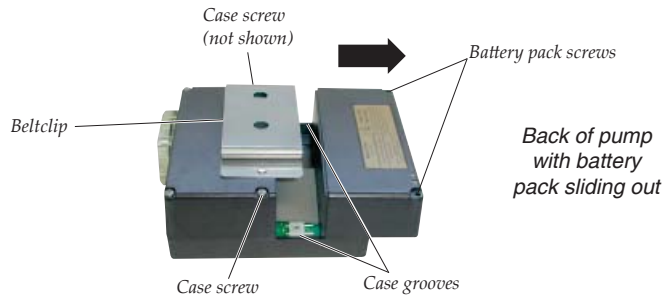

- ❗ **Use of a repaired or rebuilt battery pack voids any warranty and the UL Listing for intrinsic safety.**
- ❗ **Do not charge or operate pump from charger in hazardous locations!**
- ❗ **Use only an SKC-approved charger and battery pack designed for the Universal Sample Pump to ensure reliable performance. Failure to do so voids intrinsic safety and any warranty.**
- ❗ **Failure to follow warnings and cautions voids any warranty.**

SKC Limited Warranty and Return Policy

SKC products are subject to the SKC Limited Warranty and Return Policy, which provides SKC's sole liability and the buyer's exclusive remedy. To view the complete SKC Limited Warranty and Return Policy, go to <http://www.skcinc.com/warranty.asp>.




Operating Instructions

863 Valley View Road, Eighty Four PA 15330 USA
Tel: 724-941-9701 Fax: 724-941-1369 e-mail: skctech@skcinc.com
www.skcinc.com

Battery Pack for Universal Sample Pumps

1. To remove a battery pack, remove the two screws that secure the battery pack and loosen the two case screws above and below the belt clip.
2. Carefully slide battery pack out from under the belt clip. Ensure that the battery is kept level.
3. To install a battery pack, slide the front edge of the new battery pack under the belt clip and position battery pack to engage the grooves in the case.
4. Slide the battery pack toward the pump until it is flush with the pump case on all sides.
5. Reinstall battery screws and tighten the case screws.
6. Charge the new battery pack.

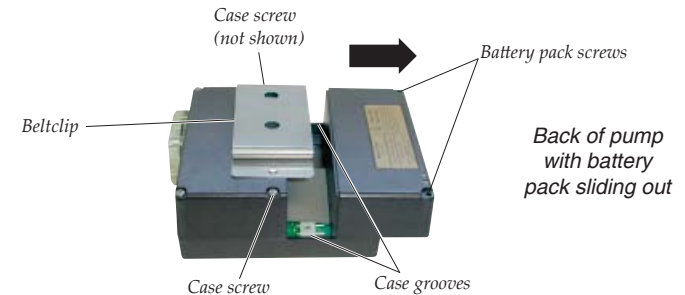

- ❗ **Use of a repaired or rebuilt battery pack voids any warranty and the UL Listing for intrinsic safety.**
- ❗ **Do not charge or operate pump from charger in hazardous locations!**
- ❗ **Use only an SKC-approved charger and battery pack designed for the Universal Sample Pump to ensure reliable performance. Failure to do so voids intrinsic safety and any warranty.**
- ❗ **Failure to follow warnings and cautions voids any warranty.**

SKC Limited Warranty and Return Policy

SKC products are subject to the SKC Limited Warranty and Return Policy, which provides SKC's sole liability and the buyer's exclusive remedy. To view the complete SKC Limited Warranty and Return Policy, go to <http://www.skcinc.com/warranty.asp>.